

Managed Pressure Drilling Hose bleed off line



STANDARD

API Spec. 17K

CONSTRUCTION

Bore type

full flow, smooth bore

Liner material

H₂S resistant PA

Operating temperature


-4°F to 158°F (-20°C to 70°C)

Max. available length

60m (200 ft)

FEATURES & COMMENTS

- › Used in both deepwater, shallow water and onshore MPD systems
- › Fit for purpose hoses and hoses for Dual Gradient Drilling (DGD systems) are also available upon request
- › Further sizes and pressure ratings are available upon request
- › Coupling materials meet NACE MR 01-75 / ISO 15156 latest edition

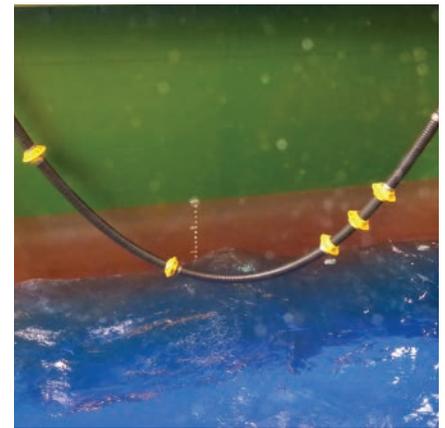

TECHNICAL DATA

Inside Diameter		Type	Rated Working Pressure		Test Pressure		Safety Factor	Outer Diameter		MBR (static)		MBR (dynamic)		Weight	
mm	in.		bar	psi	bar	psi		WP	mm	in.	m	ft.	m	ft.	kg/m
53	2.0	Fire rated c/w st. st. wrap	345	5,000	517	7,500	2.25	141	5.53	0.8	2.62	1.0	3.28	29.4	19.7
		Fire rated c/w moonpool protection						156	6.14	0.8	2.62	1.0	3.28	38.4	25.8